

ECHO

Power Panel MK2

Fast Blow



3.15A Fuse



Charger ON/OFF

FEATURES

- 12V 12A DC to DC Charger
- 12V 12A AC Charger
- Integrated 120W Solar Panel Charger
- LED Charge Source Indicator
- Optional 230VAC Inverter
- Digital Battery Voltage & Charge/Discharge Current Monitor
- Under Voltage Battery Protector
- Output Short Circuit Protection

CAUTION

- Do not reverse battery polarity
- Ensure that Geyser is filled with water when fitted
- Do not expose to rain or water
- Do not block ventilation holes



Monitor Screen



Master 12V




Lights ON/OFF



Pump ON/OFF

Main 220/240VAC Supply

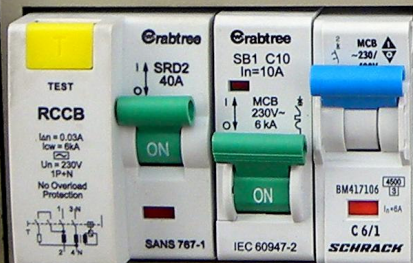


Earth Leakage

Plugs 10A max 6A max

Warning!

High Voltages Inside
Only to be opened by
Service Personnel

230VAC 300W Inverter Output

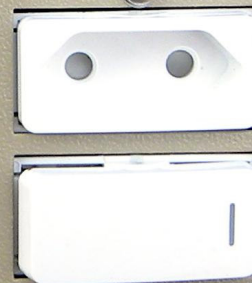

Model: EPP1 MK2